

K-Beam[®] Accelerometer

Type 8395A...

Capacitive MEMS, Triaxial Accelerometer


Type 8395A... is a high-sensitivity, low noise triaxial accelerometer which simultaneously measures acceleration and/or low-frequency vibration in three mutually perpendicular axes (x, y, z). The accelerometer features include:

- Measuring ranges: ± 2 g, ± 10 g, ± 30 g, ± 50 g, ± 100 g, ± 200 g
- Frequency response: 0 ... 1 000 Hz (5 %) (except ± 2 g)
- Bipolar ± 4 V, single-ended 2,5 V ± 2 V and ± 4 V or ± 8 V differential accelerometer outputs
- Operating temperature: -55 ... 125 °C
- Low noise
- Excellent thermal stability
- Small cube, 30 grams mass
- Wide supply voltage range, 5 ... 50 VDC
- 6 000 g_{pk} shock rated
- Conforming to **CE**

Description

Type 8395A... triaxial capacitive accelerometer family utilizes a silicon Micro-Electro-Mechanical System (MEMS) variable capacitance sensing element. The sensing element of each axis consists of a very small inertial mass and a flexure element cantilever positioned between two plates. As the mass deflects under acceleration, the capacitance between these plates changes. AC excitation and synchronous amplitude demodulation circuitry contained in the accelerometer's internal signal conditioner provides an analog output signal proportional to the applied acceleration. This output signal is scaled as a voltage which is proportional to the applied acceleration.

The output signal format is available as bipolar 0 ± 4 V, single-ended 2,5 V ± 2 V and 0 ± 4 V or 0 ± 8 V differential. The accelerometer is powered by a single regulated supply between 6 and 50 VDC (+5 VDC supply options are available as well on request). Temperature output is provided if external compensation of the output signal is desired. The sensing element and electronics are contained in a lightweight, welded titanium housing with either a circular 9-pin connector or an integral cable with braid shield protection terminated by pigtailed or 9-pin D-Sub connector. Ground isolation is obtained by mounting the sensor using one of the off-ground accessories or by adhesively mounting the sensor to the test object using the side of the sensor with the integral hard anodized plate.

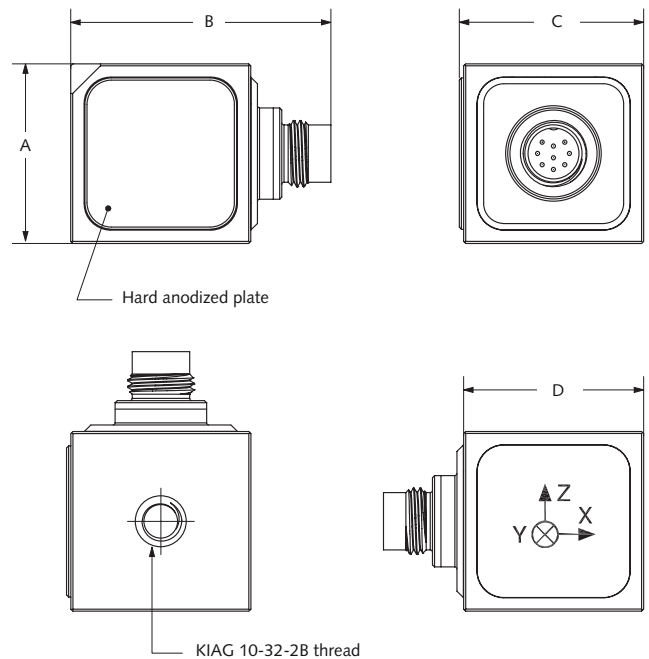

Outline Dimensions

	AT, BT Versions	CT, DT Versions
A	21,6	21,6
B	31	34,5
C	22,1	22,1
D	21,6	21,6

8395A_000-860e-05.13

Technical Data

Type	Unit	8395A2D0	8395A010	8395A030	8395A050	8395A100	8395A200
Acceleration range	g	±2	±10	±30	±50	±100	±200
Frequency response, ±5 %	Hz	0 ... 250			0 ... 1 000		
Damping ratio, typical					0,7		
Sensitivity, ±5 % (ref 100 Hz),							
Output Type AT, 0 ±4 V FSO output	mV/g	2 000	400	133,3	80	40	20
Output Type BT, 2,5 ±2 V FSO output	mV/g	1 000	200	66,6	40	20	10
Output Type CT, 0 ±4 V FSO differential	mV/g	2 000	400	133,3	80	40	20
Output Type DT, 0 ±8 V FSO differential	mV/g	4 000	800	266,6	160	80	40
Resonant frequency, nom.	kHz	1,3	2	4	5,1	7,2	11
Transverse sensitivity, typ. (max.)	%				1,0 (3,0)		
Sensitive axis misalignment, typ. (max.)	mrad				10 (30)		
Amplitude linearity, (max.)	%FSO				±1		
Phase shift (max.)							
@ 0 Hz	degrees				0		
@ 10 Hz	degrees				2		
@ 100 Hz	degrees	20			10		
Noise density, 0 ... 100 Hz typ. (max)	mgrms/√ Hz	0,025 (0,030)	0,125 (0,15)	0,375 (0,45)	0,625 (0,75)	1,25 (1,5)	2,5 (3)
Noise 0 ... 100 Hz, (typ.)	mgrms	0,25	1,25	3,75	6,25	12,5	25
Resolution (threshold), (typ.)	mgrms	0,35	1,75	3,85	8,75	17,5	35
Electrical							
0 g output (output type)	mV	0 ±60 (AT); 2 500 ± 30 (BT); 0 ±60 (CT); 0 ±120 (DT)					
Capacitive load, (max.)	µF	0,5					
Load resistance (min.)	kΩ	30					
Output impedance, typ.	Ω	300					
Supply current, (nom.)	mA	4,2					
Supply voltage, temperature	VDC	6 ... 50 (≤100 °C); 6 ... 35 (≤110 °C); 6 ... 20 (≤120 °C); 6 ... 12,5 (≤125 °C) ¹⁾					
Reverse polarity protection		Yes					
Environmental							
Shock, (half sine, 200 µs)	g	6 000					
Random, (20 ... 2 000 Hz)	g rms	20					
Storage temperature range	°C	-55 ... 125					
Operating temperature range	°C	-55 ... 125					
Temp. coeff. sensitivity, typ. (max)	ppm/°C	±100 (±300)					
Temp. coeff. sensitivity, typ. (max)	%/°C	±0,01 (±0,030)					
Temp. coeff. of bias, typ. (max)	mg/°C	±0,1 (±0,8)	±0,5 (±4)	±1,5 (±12)	±2,5 (±20)	±5 (±40)	±10 (±80)
Temperature sensor							
Output @ 20 °C	V	1,632					
Sensitivity	mV/°C	-11,77					
Accuracy	°C	±5					
Physical							
Case		Titanium					
Mounting		KIAG 10-32 stud/adhesive					
Sealing		Hermetically Sealed					
Ground isolation		Yes					
Weight (excluding cable)	grams	30					
Cable length tolerance	m	±0,1					

Operation of sensor with supply voltage exceeding stated values at indicated temperatures will cause permanent damage to sensor.

¹⁾ Contact Kistler for +5 VDC supply voltage versions. 1 g = 9,80665 m/s², 1 inch = 25,4 mm, 1 gram = 0,03527 oz, 1 lbf-in = 0,1129 N·m

Application

Type 8395A... is an instrument grade triaxial accelerometer. As such, Type 8395A... is well suited for a wide variety of R&D and OEM applications requiring precision measurements and packaging for demanding application and handling needs.


In particular, the sensor design is optimized for low frequency applications common to Aviation/Aerospace, Automotive, Civil Engineering Structures, Seismic, Railway and other R&D studies. In particular, Aviation/Aerospace ground and flight testing often evaluates dynamics and structural vibration to assess performance parameters, reliability and integrity. Automotive laboratory and road testing often evaluates system parameters such as vehicle ride, dynamics and structural analysis to assess performance parameters, reliability and durability. Civil engineering structures, such as bridges, often are evaluated for structural response to assess the integrity of the bridge to ensure safety. Seismic ground and structural testing is often performed to measure the effect of earthquakes and other natural phenomena. The differential versions are being used for railway comfort or conditional maintenance monitoring applications where halogen free cables are requested as well. Other R&D studies include human motion, robotics and

Mounting

Reliable and accurate measurements require that the mounting surface be clean and flat. The accelerometer can be directly attached to the test structure with the supplied stud. Alternately, a ground isolated adhesive mount is obtained by mounting the hard anodized aluminum side of the sensor to the test object. Several optional accessories are offered to mount Type 8395A... Type 8466K01 has an integral KIAG 10-32 stud and screws into threaded hole on the sensor to provide a ground isolated adhesive mount. Type 8466K02 is similar to Type 8466K01 except it has a threaded 10-32 hole to provide a ground isolated stud mount. Type 8466K03 has an integral KIAG 10-32 stud and screws into threaded hole on the sensor and provides a magnetic mount for the sensor. The instruction manual for Type 8395A... provides detailed information regarding mounting surface preparation.


Wiring - Mating Cable

Sensor Connector	Function output		Cable Type 1792A...K00	Cable Type 1792A...K01
	AT, BT version	CT, DT versions	pigtail (color)	9 pin D-Sub
1	Power	Power	Red	1
2	Ground	Ground	Black	2
3	X DC output	X DC output +	White	3
4	Y DC output	Y DC output +	Yellow	4
5	Z DC output	Z DC output +	Blue	5
6	Temperature output	Temperature output	Orange	9
7	N/C	X DC output -	Brown	6
8	N/C	Y DC output -	Green	7
9	N/C	Z DC output -	Violet	8







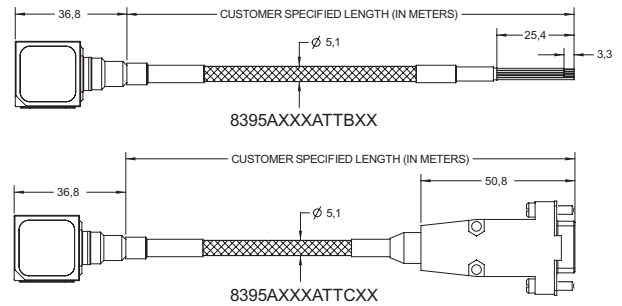







9 pin circular male connector sensor view

Integral Cable Solution



8395A_000-860e-05.13

Measuring Chain

 Type 8395A... MEMS	 Type 1792A...K01 9 pin neg. circular 9 pin pos. D-Sub	 Type 1794, 9 pin neg. D-Sub (3) BNC pos. (2) banana jacks for output AT and BT only	 not supplied	
 Type 8395A... MEMS	 Type 1792A...K00 9 pin neg. circular pigtail	customer supplied		
 Type 8395A... 15 up to 5	 Type 1792A...K01 9 pin neg. circular 9 pin pos. D-Sub	 Type 5146A15 15 channels power supply	 Type 1511 BNC pos. BNC pos.  customer supplied	 Read-out

Included Accessories

- KIAG 10-32 mounting stud
- Mounting wax


Type/Art. No.

8402
8432

Optional Accessories

- Adhesive mounting base (off-ground) with KIAG 10-32 male sensor side **8466K01**
- Mounting base (off-ground) with KIAG 10-32 male sensor side to KIAG 10-32 female mounting side **8466K02**
- Magnetic mounting base **8466K03**
- Interface plate for compatibility with legacy Type 8393 mounting hole pattern **8466K04**
- Cable – mini 9 pin circular connector female, silicone jacket to pigtail (lengths 2, 5, 10, and sp meters) **1792AxxK00**
- Cable – mini 9 pin circular connector female, silicone jacket to 9 pin D-Sub (lengths 2, 5, 10 and sp meters) **1792AxxK01**
- 9 pin neg. D-Sub (3) BNC pos. | (2) banana jacks **1794...**
- Halogen-free cable – mini 9 pin circular connector female to pigtail (lengths sp meters) **1792AK10sp**
- Braided cable – mini 9 pin circular connector female, silicone jacket to pigtail (lengths 2, 5, 10, and sp meters) **1792AxxKB00**
- Braided cable – mini 9 pin circular connector female, silicone jacket to 9 pin D-Sub (lengths 2, 5, 10 and sp meters) **1792AxxKB01**

Center of Sensing Elements

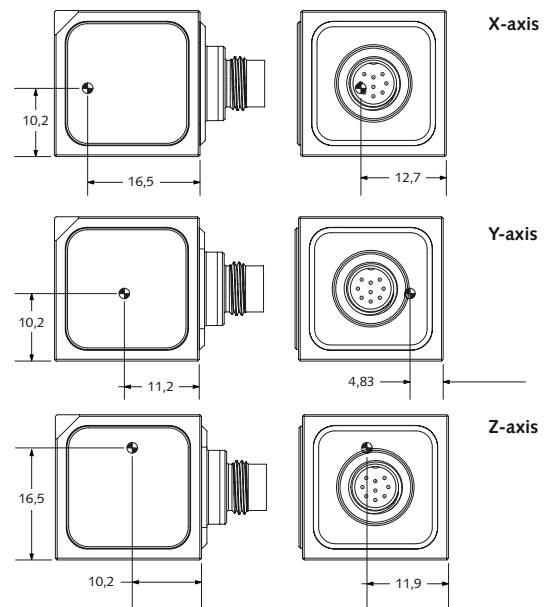

Ordering Key

Type 8395A

Measuring Range

±2 g	2D0
±10 g	010
±30 g	030
±50 g	050
±100 g	100
±200 g	200

Output Type*

0 ±4 V FSO with temperature output	AT
2,5 ±2 V FSO, with temperature output	BT
0 ±4 V differential with temperature output	CT
0 ±8 V differential with temperature output	DT

Housing

Hermetic titanium housing	T
---------------------------	----------

Electrical Interface/Cable Length (m)

Integral 9 pin connector	A00
Integral cable, braid shield protection, pigtail (specify length up to 20 m)	Bxx
Integral cable, braid shield protection, 9 pin D-Sub connector termination (specify length up to 20 m)	Cxx

* Contact Kistler for +5 VDC supply or longer cable options

8395A_000-860e-05.13